

Technical data sheet for

M2

High Performance Dishwasher

W 705mm x D 765mm x H 1530mm



The M2 washes up to 1000 plates per hour and is ideal for most restaurants - the market leader in passthrough dishwashers.

Standard Features

- High speed 1,2,3 minute cycles with large heating elements to ensure fast recovery for next cycle
- High efficiency 3 litres per cycle water consumption
- 430mm high wash chamber clearance
- Auto start on door closure
- Anti-drip door edge channels water away from operator
- Suits 500mm international standard racks
- Adjustable and removeable tilting rack slide
- Full length door springs allow fingertip lifting with tension of 2kg
- Stainless steel arms with removable end caps for cleaning
- Electromechanical controls
- 220mm leg clearance for access beneath machines
- Corner or in-line installation
- Double filtration via scrap trays and separate wash inlet filter
- L-shaped tank with curved corners
- Robust stainless steel construction
- 750W wash pump recirculates wash water at nominal 350 litres per minute through upper and lower wash arms
- Fits 650mm deep bench for in-line installation - 700mm in corner application
- Integral precision detergent dispensing pump
- Backflow prevention fitted


Accessories

- 2 x 500mm Dish Racks
- 1 x 500mm Cup Rack
- 1 x Cutlery basket
- 1 x Cutlery Container

Options

- Rinse Pump
- Drain Pump
- Rinse Aid Injector
- Fisher Pre-rinse gun or faucet
- Complete wash stations



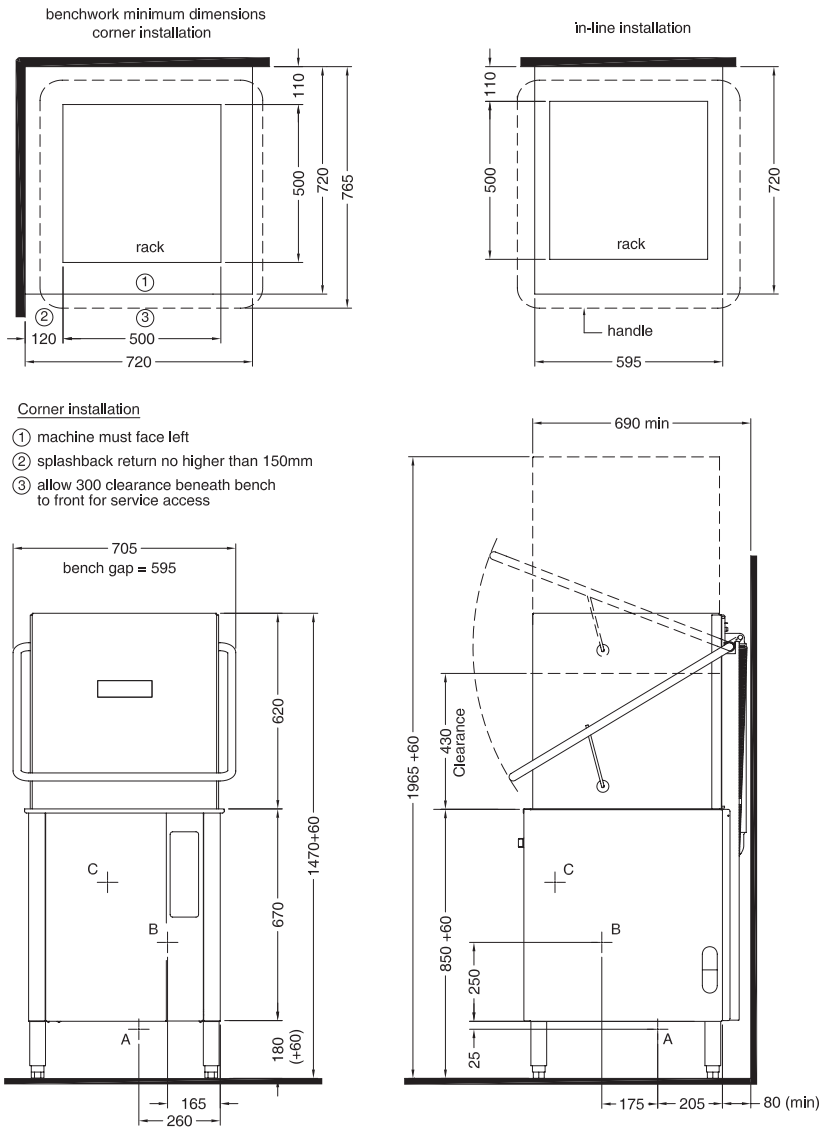

Corner installation

- ① machine must face left
- ② splashback return no higher than 150mm
- ③ allow 300 clearance beneath bench to front for service access



Designed and manufactured by
WASHTECH®

ISO9001
All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



On call service where you are.
Washtech provides full service backup, 24 hours a day, 7 days a week with factory based technicians and a comprehensive nationwide network of independent service providers.
STARLINE SERVICE 09 829 0923

WASHTECH LTD

PO Box 90-548
Auckland 1142

414 Rosebank Road
Avondale
Auckland 1026
New Zealand

Phone 09 829 0930
info@washtech.co.nz
www.starline.co.nz

© Copyright Washtech 2011

A	Hot Water	temperature connection pressure flow quality backflow prevention	65C 3/4" 200-350 kPa 20 litres per min potable & soft atmospheric vacuum breaker
B	Waste	connection line	1.5 BSP 2" BSP
C	Electrical	single phase 230V 50Hz Reduced heating option OR 3 phase N+E 400V 50Hz	25A, 5.3kW 15A, 3kW 10A/phase, 6.9kW

Refer operator manual for complete installation instructions.

Dimensions		Packed Dimensions	
Width	705mm	Width	760mm
Depth	765mm	Depth	810mm
Height	1530mm	Height	1450mm
Weight	97kg	Weight	120kg
		Cubic metres	0.9m ³